


MAXI 250

M I G R A N G E



TECHNICAL DATA

Voltage class	L
Cooling	Air cooled
Wire Ø mm	0.8 • 0.9 • 1.0 • 1.2
Duty cycle 60%	250A CO ₂ • 200A Mix



	MAXI 250	m	LINER	ADAPTOR
EURO-TW SPRING PINS	MA6265	3	GM0012	AR0083
	MA6266	4	GM0012	AR0083
	MA6267	4.6	GM0012	AR0083

DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.



EN 60974-7

trafimet[®]

your welding partner


www.trafimet.com

MAXI 250


M I G R A N G E



BX0024 • Standard BX0068 Microswitch



MF0146 • Standard




MF0145




ME0001
1/4-28 UNF
38
Ø 6,3
MD0003-08 Ø 0.8
MD0003-09 Ø 0.9
MD0003-10 Ø 1.0 • Standard
MD0003-12 Ø 1.2

ALUMINIUM
MD0003-62 Ø 1.2


Triangular
MD1003-08 Ø 0.8
MD1003-09 Ø 0.9
MD1003-10 Ø 1.0
MD1003-12 Ø 1.2

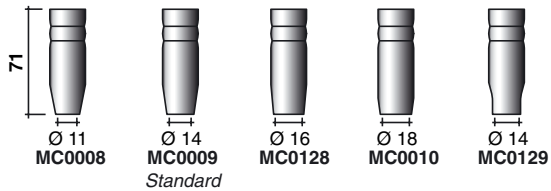

AR0083 Spring pins



Special liners for aluminium with GM0240 liner included				
STEEL	TEFLON	TEFLON	TEFLON-GRAPHITE	CARBON
m	- wire 0.60.9 -			
4.6	GM0011			
m	- wire 0.91.2 -			
4.6	GM0012	GM0230	GM0705	GM0706 GM0707
m	- wire 1.21.6 -			
4.6				

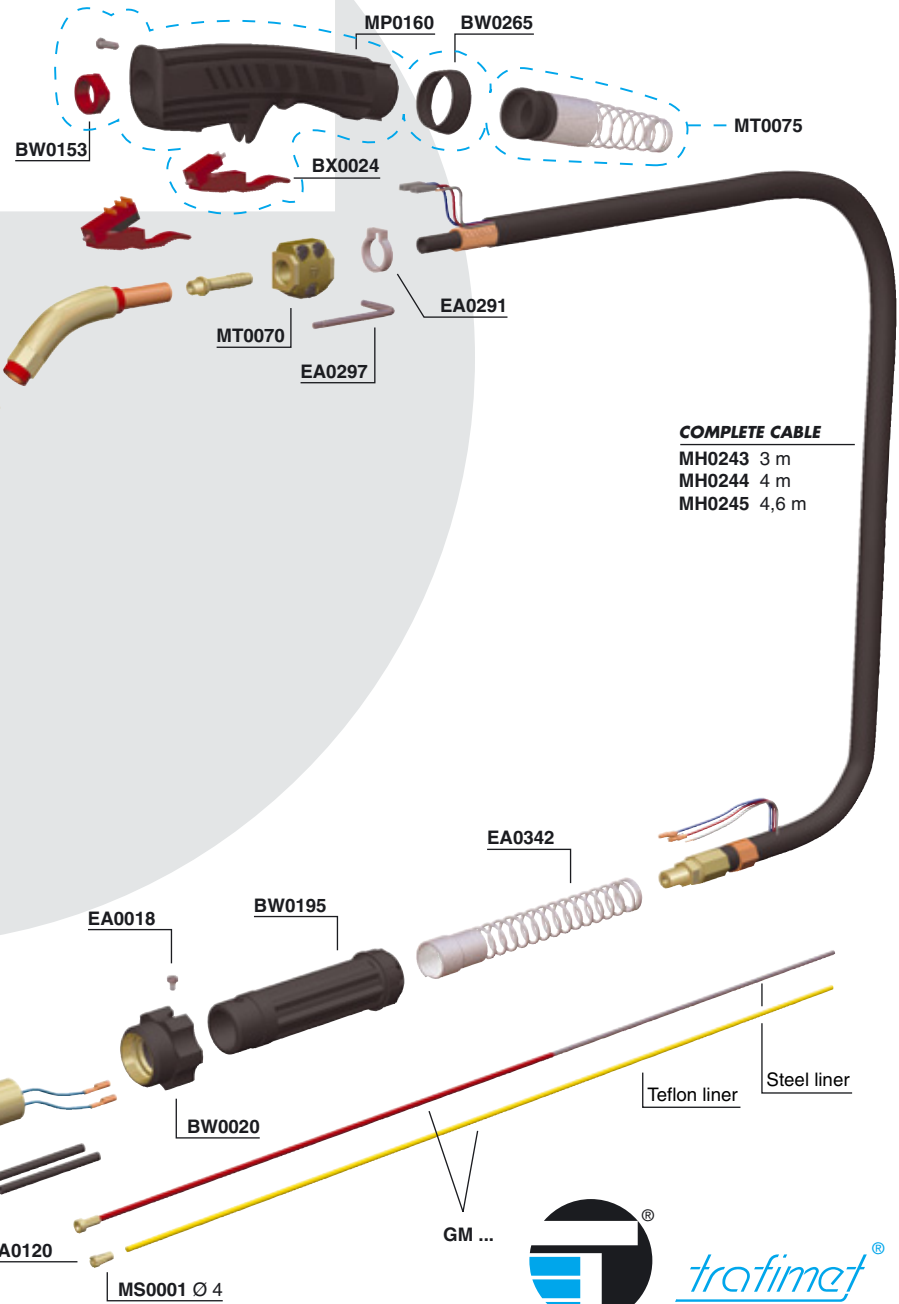

COMPLETE CABLE
MH0243 3 m
MH0244 4 m
MH0245 4,6 m

