


ERGOPLUS 500

M I G R A N G E



TECHNICAL DATA

Voltage class	L
Cooling	Water cooled
Wire Ø mm	1.0 • 1.2 • 1.6 • 2.0 • 2.4
Duty cycle 100%	500A CO ₂ • 450A Mix
Max cooling liquid temp.	60° C
Min and max inlet liquid press.	1,5 ÷ 4
Min liquid flow rate	1,5 l/min (4 m lenght)



ERGOPLUS 500 m LINER ADAPTOR TRIGGER

	ERGOPLUS 500 m	LINER	ADAPTOR	TRIGGER	
 EURO SPRING PINS	MB7843	3	GM0530	AR0052	BX0024
	MB7844	4	GM0531	AR0052	BX0024
	MB7845	5	GM0532	AR0052	BX0024

DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.




EN 60974-7

trafimet[®]


your welding partner

www.trafimet.com


MP0133 Black
 MP0134 Red
 MP0135 Blue • Standard



M6	MD0009-08	Ø 0.8	ALUMINIUM	Cu Cr Zr	M8	MD0005-08	Ø 0.8	ALUMINIUM	Cu Cr Zr
	MD0009-09	Ø 0.9	MD0009-58	Ø 0.8		MD0005-10	Ø 1.0	MD0005-58	Ø 0.8
	MD0009-10	Ø 1.0	MD0009-60	Ø 1.0		MD0005-12	Ø 1.2	MD0005-60	Ø 1.0
	MD0009-12	Ø 1.2	MD0009-62	Ø 1.2		MD0005-14	Ø 1.4	MD0005-62	Ø 1.2
	MD0009-16	Ø 1.6	MD0009-66	Ø 1.6		MD0005-16	Ø 1.6	MD0005-66	Ø 1.6
						MD0005-20	Ø 2.0	MD0005-70	Ø 2.0
						MD0005-24	Ø 2.4	MD0005-74	Ø 2.4

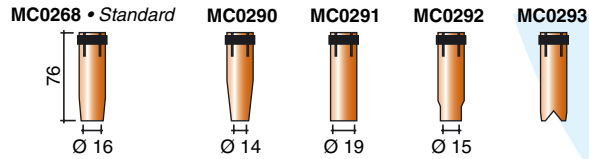

AR0052 Spring pins



Special liners for aluminium with GM0240 liner included				
STEEL	TEFLON	TEFLON	TEFLON-GRAPHITE	CARBON
Blue - wire 0.60.9 -				
3	GM0522	GM0600	GM0710	
4	GM0523	GM0601	GM0711	
5	GM0524	GM0602	GM0712	
Red - wire 1.01.2 -				
3	GM0526	GM0610	GM0715	GM0720
4	GM0527	GM0611	GM0716	GM0721
5	GM0528	GM0612	GM0717	GM0722
Neutral - wire 1.01.2 -				
3	GM0530	GM0760		
4	GM0531	GM0761		
5	GM0532	GM0762		
Yellow - wire 1.21.6 -				
3	GM0530	GM0760		
4	GM0531	GM0761		
5	GM0532	GM0762		
- wire 2.02.4 -				
3	GM0534			
4	GM0535			
5	GM0536			

