


MAXI 150

M I G R A N G E



TECHNICAL DATA

Voltage class	L
Cooling	Air cooled
Wire Ø mm	0.6 • 0.8 • 0.9 • 1.0 • 1.2
Duty cycle 60%	180A CO ₂ • 140A Mix



DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.




EN 60974-7

MAXI 150 m LINER ADAPTOR

	MAXI 150	m	LINER	ADAPTOR
 EURO-TW SPRING PINS	MA6165	3	GM0012	AR0083
	MA6166	4	GM0012	AR0083
	MA6167	4.6	GM0012	AR0083

trafimet[®]

your welding partner

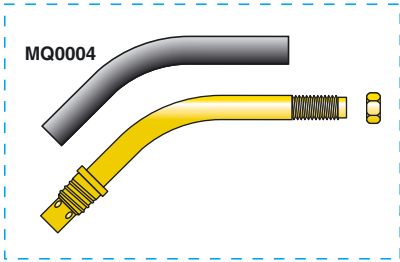


MF0002

	M6	MD0008-06	ALUMINIUM	
	2.5	MD0008-08 • Standard		MD0008-58 Ø 0.8
	Ø 6	MD0008-09		MD0008-60 Ø 1.0
		MD0008-10		MD0008-62 Ø 1.2
		MD0008-12		

	53	MC0005	MC0006 • Standard	MC0007
	Ø 11			
	Ø 14			

AR0083 Spring pins



STEEL	TEFLON	Special liners for aluminium with GM0240 liner included		
		TEFLON	TEFLON-GRAPHITE	CARBON
m	- wire 0.60.9 -			
4.6	GM0011			
m	- wire 0.91.2 -			
4.6	GM0012	GM0230	GM0705	GM0706
m	- wire 1.21.6 -			
4.6				



COMPLETE CABLE
MH0310 3 m
MH0311 4 m
MH0312 4,6 m

EA0018

EA0342

BW0195

BW0018

Teflon liner

Steel liner

MQ0129

GM ...

EA0120

MS0001 Ø 4



trafimet
your welding partner

