


MAXI 5000

M I G R A N G E

TECHNICAL DATA

Voltage class	L
Cooling	Water cooled
Wire Ø mm	1.0 • 1.2 • 1.6 • 2.0 • 2.4
Duty cycle 100%	550A CO ₂ • 500A Mix
Max cooling liquid temp.	60° C
Min and max inlet liquid press.	1,5 ÷ 4
Min liquid flow rate	1,5 l/min (4 m lenght)



DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.



EN 60974-7

MAXI 5000 m LINER ADAPTOR TRIGGER

EURO SPRING PINS	MB7933	3	GM0530	AR0052	BX0024
	MB7943	4	GM0531	AR0052	BX0024
	MB7953	5	GM0532	AR0052	BX0024



MAXI 5000


M I G R A N G E

MP0133 Black St.




BX0020


BX0024 • Standard




copper
ME0345



plastic
ME0089 • Standard




ceramic
ME0589



ALUMINIUM


Cu Cr Zr

MD0250-62 Ø 0.8
MD0250-66 Ø 1.0
MD0250-80 Ø 1.0
MD0250-82 Ø 1.2 • Standard
MD0250-84 Ø 1.4
MD0250-86 Ø 1.6




MC0345

AR0052 Spring pins



		Special liners for aluminium with GM0240 liner included		
STEEL	TEFLON	TEFLON	TEFLON-GRAPHITE	CARBON
Blue - wire 0.60.9 -				
3	GM0522	GM0600	GM0710	
4	GM0523	GM0601	GM0711	
5	GM0524	GM0602	GM0712	
Red - wire 1.01.2 -		Neutral - wire 1.01.2 -		
3	GM0526	GM0610	GM0715	GM0720
4	GM0527	GM0611	GM0716	GM0721
5	GM0528	GM0612	GM0717	GM0722
Yellow - wire 1.21.6 -				
3	GM0530	GM0760		
4	GM0531	GM0761		
5	GM0532	GM0762		
- wire 2.02.4 -				
3	GM0534			
4	GM0535			
5	GM0536			

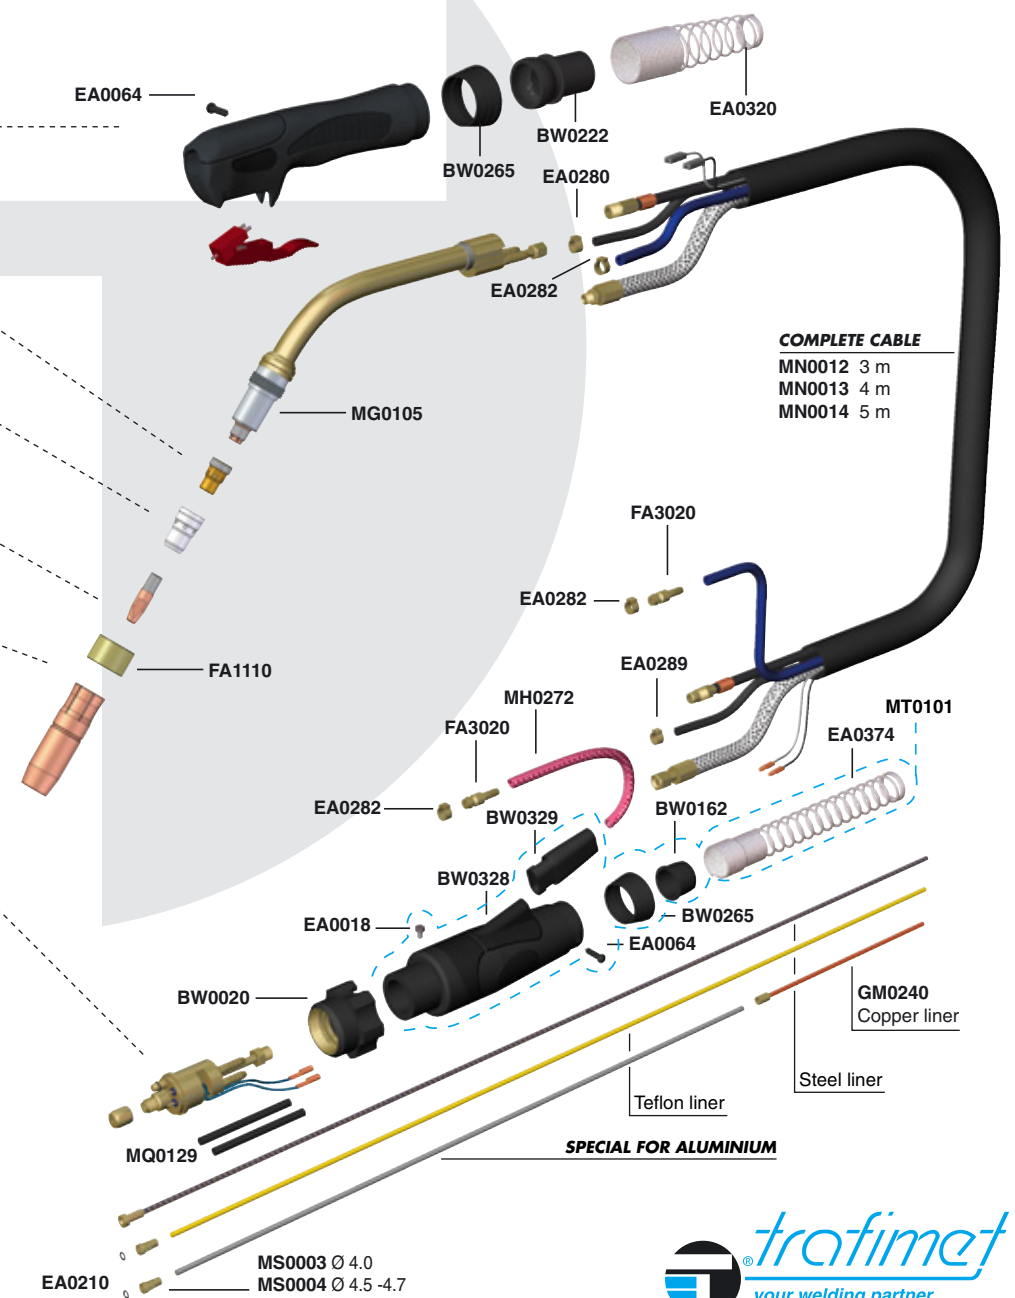

COMPLETE CABLE

MN0012 3 m
MN0013 4 m
MN0014 5 m

SPECIAL FOR ALUMINIUM

