




MEGA 2

M I G R A N G E

TECHNICAL DATA

| | |
|----------------|---------------------------------|
| Voltage class | L |
| Cooling | Air cooled |
| Wire Ø mm | 0.8 • 0.9 • 1.0 • 1.2 |
| Duty cycle 60% | 250A CO ₂ • 200A Mix |



| | MEGA 2 | m | FEET | LINER | ADAPTOR |
|---|---------|-----|------|---------|---------|
|  | MA5200 | 3 | 10 | GM0012 | AS0047 |
| | MA5201 | 4 | 12 | GM0012 | AS0047 |
| | MA5202 | 4.6 | 15 | GM0012 | AS0047 |
|  | MA 5265 | 3 | 10 | GM 0012 | AR 0083 |
| | MA 5266 | 4 | 12 | GM 0012 | AR 0083 |
| | MA 5267 | 4.6 | 15 | GM 0012 | AR 0083 |

DECLARATION OF CONFORMITY





The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.











EN 60974-7

trafimet[®]

your welding partner





- MD0003-08 14-30 Ø 0.8
- MD0003-09 14-35 Ø 0.9
- MD0003-10 14-40 Ø 1.0 • Standard
- MD0003-12 14-45 Ø 1.2

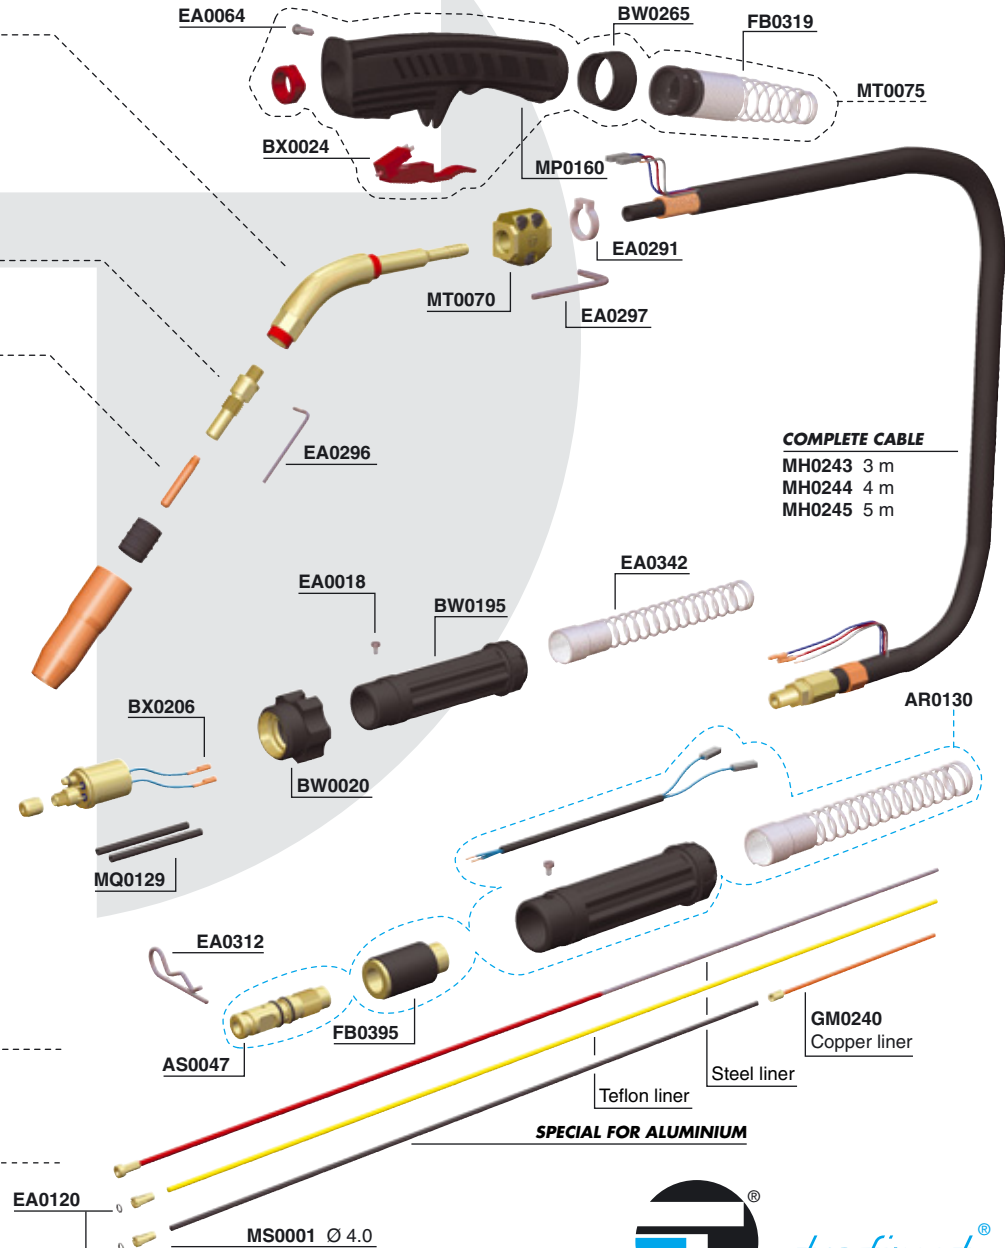

- COMPLETE CABLE**
- MH0243 3 m
 - MH0244 4 m
 - MH0245 5 m

AR0083 Spring pins

AR0130 MK Adaptor

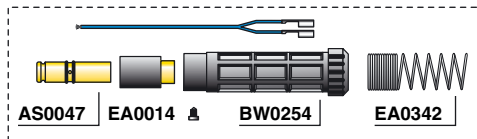

Special liners for aluminium with GM0240 liner included

| STEEL | TEFLON | TEFLON | TEFLON-GRAPHITE | CARBON |
|-------|-----------------|--------|-----------------|--------|
| m | - wire 0.81.0 - | | | |
| 4.6 | GM0011 | | | |
| m | - wire 1.01.2 - | | | |
| 4.6 | GM0012 GM0230 | | | |
| m | - wire 1.21.6 - | | | |
| 4.6 | GM0705 | GM0706 | GM0707 | |

SPECIAL FOR ALUMINIUM



trafimet®
your welding partner

