


MEGA 4



M I G R A N G E



TECHNICAL DATA

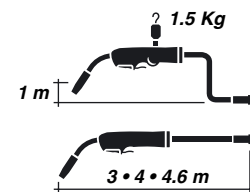Voltage class	L
Cooling	Air cooled
Wire Ø mm	0.8 • 0.9 • 1.0 • 1.2 • 1.4 • 1.6
Duty cycle 60%	400A CO ₂ • 300A Mix



	MEGA 4	m	FEET	LINER	ADAPTOR
 TW-MK	MA5400	3	10	GM0013	AS0047
	MA5401	4	12	GM0013	AS0047
	MA5402	4.6	15	GM0013	AS0047
 EURO-TW SPRING PINS	MA5465	3	10	GM0013	AR0083
	MA5466	4	12	GM0013	AR0083
	MA5467	4.6	15	GM0013	AR0083

DECLARATION OF CONFORMITY



The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.




EN 60974-7

trafimet[®]


your welding partner




- MD0004-08 14-30 Ø 0.8
- MD0004-09 14-35 Ø 0.9
- MD0004-10 14-40 Ø 1.0 • Standard
- MD0004-12 14-45 Ø 1.2
- MD0004-14 14-45 Ø 1.4
- MD0004-16 14-45 Ø 1.6

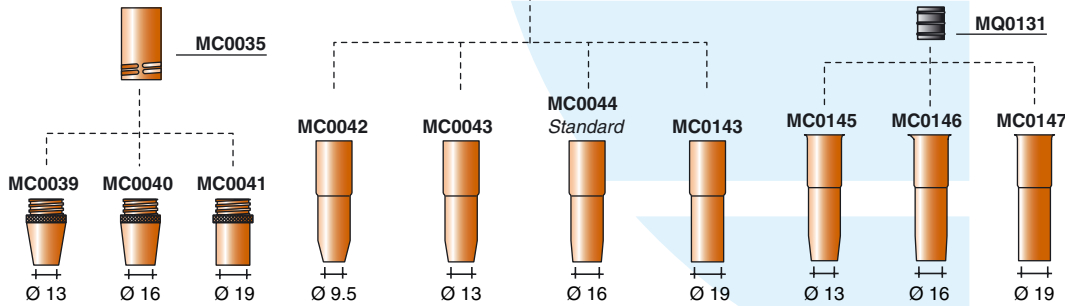

AR0083 Spring pins



AR0130 MK Adaptor

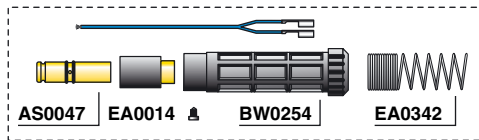

Special liners for aluminium with GM0240 liner included

STEEL	TEFLON	TEFLON	TEFLON-GRAPHITE	CARBON
m	- wire 0.91.2 -			
4.6	GM0226	GM0230		
m	- wire 1.21.6 -			
4.6	GM0013	GM0231	GM0705	GM0706
m	- wire 1.62.0 -			
4.6	GM0221			

