


# PLUS 14

M I G R A N G E

## TECHNICAL DATA

Voltage class	L
Cooling	Air cooled
Wire Ø mm	0.6 • 0.8 • 9.0 • 1.0
Duty cycle 60%	160A CO <sub>2</sub> • 140A Mix



### PLUS 14 m LINER ADAPTOR



	MA0410	MA0411	MA0412
<b>TW-MK</b>	2,5	3	4
	GM0500	GM0500	GM0501
	AR0058	AR0058	AR0058



	MA0416	MA0417
<b>DIRECT CONNECTOR</b>	2,5	3
	GM0015 a meter	GM0015 a meter

### DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.




EN 60974-7

*trafimet*<sup>®</sup>

*your welding partner*


[www.trafimet.com](http://www.trafimet.com)

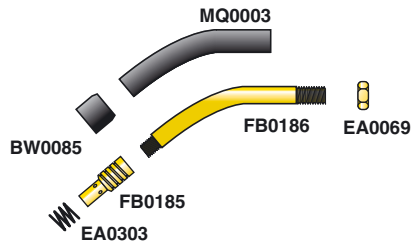


	MD0008-06	Ø 0.6
	MD0008-08	Ø 0.8 • Standard
	MD0008-09	Ø 0.9
	MD0008-10	Ø 1.0
	MD0008-12	Ø 1.2

**ALUMINIUM**



MD0008-58	Ø 0.8
MD0008-60	Ø 1.0

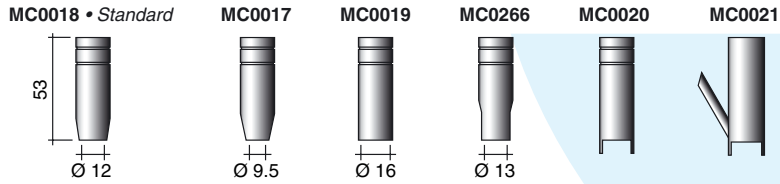

AR0054 Spring pins



m	STEEL	TEFLON	Special liners for aluminium with GM0240 liner included		
			TEFLON	TEFLON-GRAPHITE	CARBON
	Blue - wire 0.60.9 -				
2,5	GM0500	GM0600			
3	GM0500	GM0600			
4	GM0501	GM0601			
	Red - wire 1.01.2 -		Neutral - wire 1.01.2 -		
2,5	GM0510	GM0610			
3	GM0510	GM0610			
4	GM0511	GM0611			

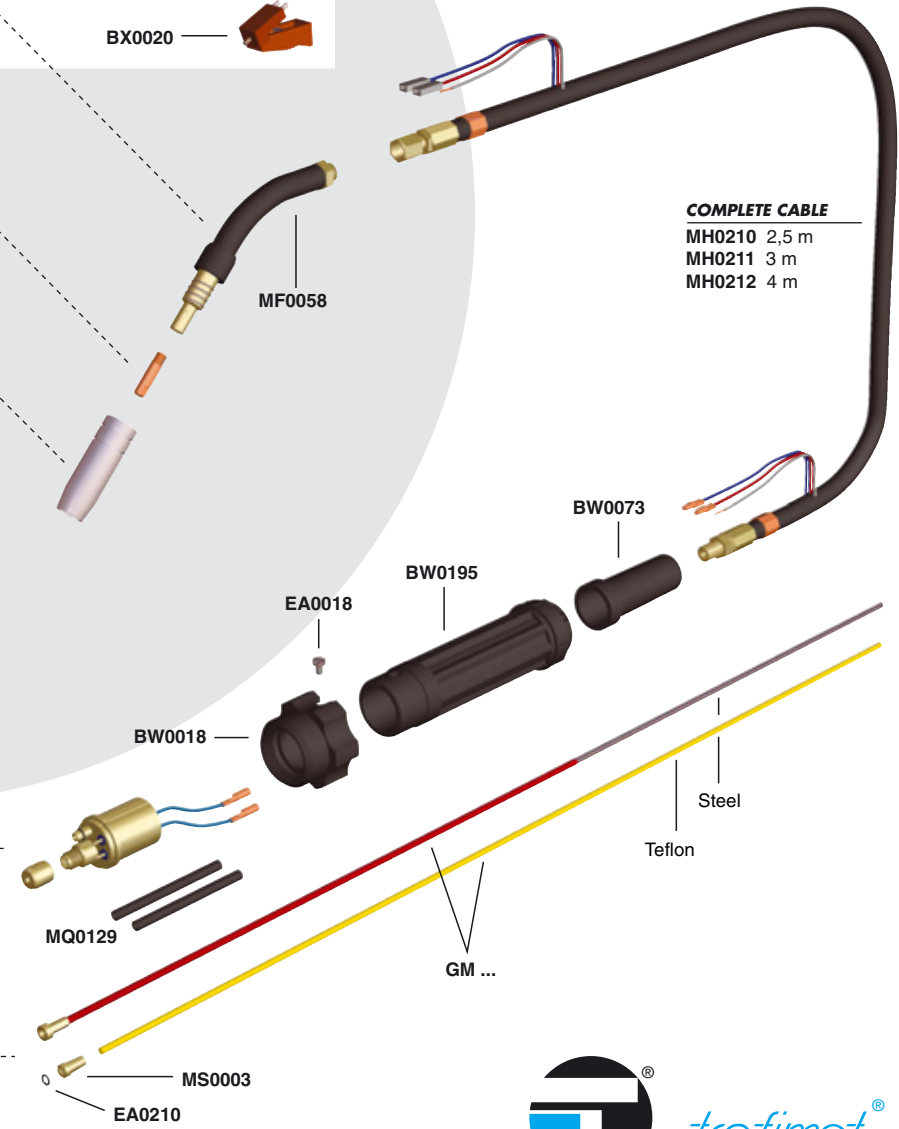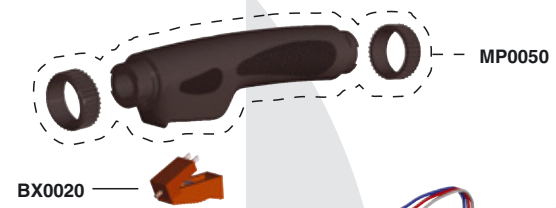

**COMPLETE CABLE**  
 MH0210 2,5 m  
 MH0211 3 m  
 MH0212 4 m

