


ERGOTIG 24

T I G R A N G E



TECHNICAL DATA

Voltage class	L
Inert gas	Argon
Duty cycle 35% DC	110
Duty cycle 35% AC	95
Electrodes Ø mm	0.5 ÷ 2.4
Cooling	Air cooled



SINTIG 24 **SINTIG 24 FX** m

	SP 1401	SQ 1401	4
FITTING	SP 1801	SQ 1801	8
M12x1	SP 1402	SQ 1402	4
FITTING	SP 1802	SQ 1802	8
3/8G			



FREE 24 **FREE 24 FX** m

	SP 4402	SQ 4402	4
FITTING	SP 4802	SQ 4802	8
3/8G			

Additional KIT	Ø
TT 0203	1.6
TT 0204	2.4

DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.



EN 60974-7


trafimet[®]


your welding partner



EA0329 ▾

 EA0329 ▾
 EA0329 ▾



BW0303 **ERGOTIG HANDLE**
 TP0090 Green • Standard
 TP0091 Blue
 TP0092 Black

BW0310


BW0307 BW0305 BW0306
  
 BX0625 BX0626

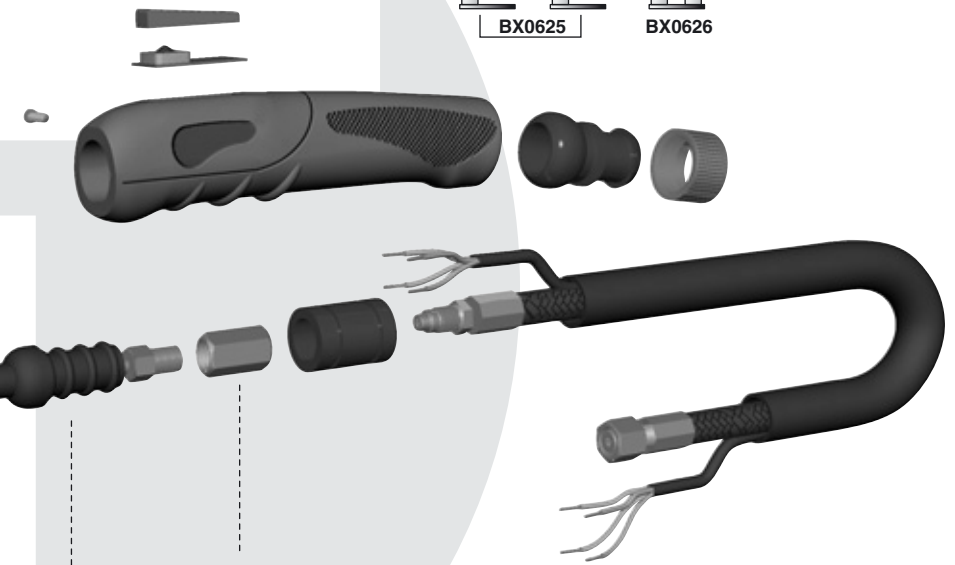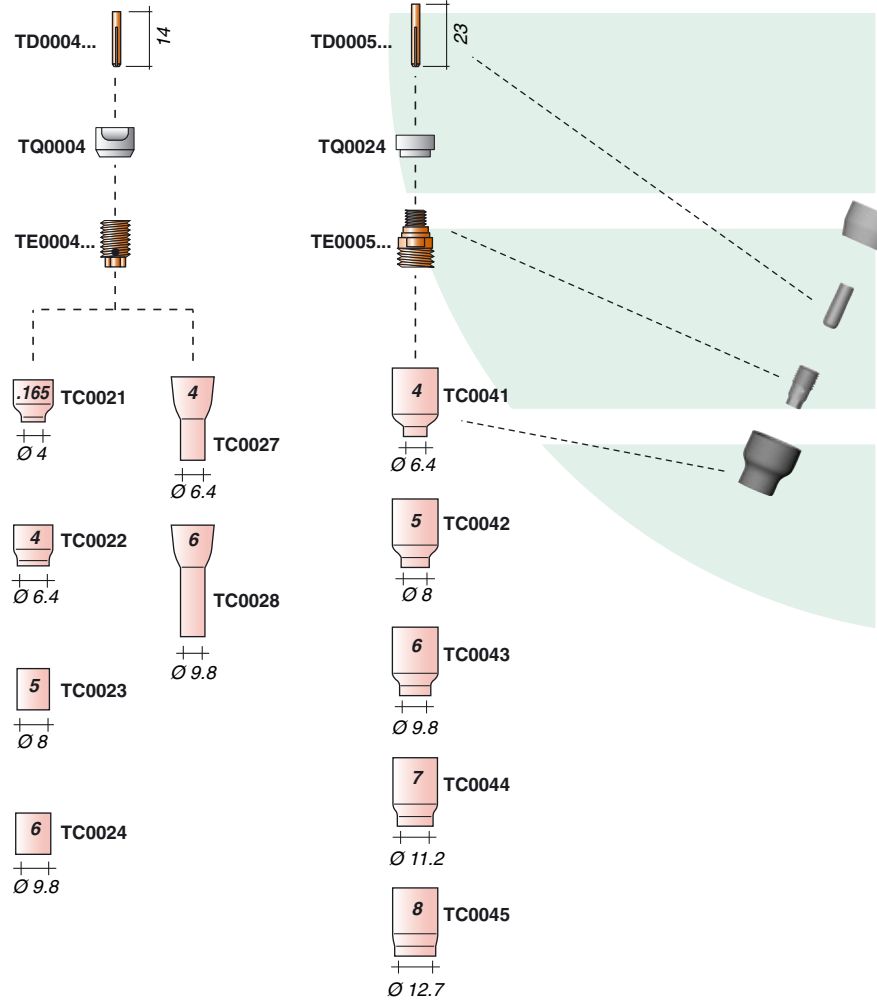


FA5130

ERGOTIG 24 COMPLETE CABLE

TH0046 4 m	TH0153 4 m
TH0047 8 m	TH0154 8 m
EU - M12 x 1	UK - 3/8 G

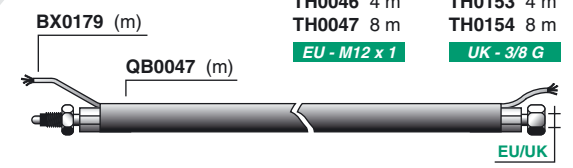

ERGOTIG 24 POWER CABLE

TH0005 4 m	TH0149 4 m
TH0006 8 m	TH0150 8 m
EU - M12 x 1	UK - 3/8 G

